

FL-NS-J Surface Ceiling Light

IP20



Application
Passage way, corner

Protection degree IP20


Materials
Body : Electro zinc coated steel sheet
Diffuser : Opal acryl

Finish
Body : White epoxy powder coat and stove enamelled(Munsell No. N-9.3)


Equipment
Fluorescent lamp : 18/20W
Light sources : T26
Lamp base : G13
Two cable inlet holes (diameter : 30mm)

Electrical
AC 100~240V, 50/60Hz are available on request
Ballast : Glow, Electronic

■ Technical Drawing

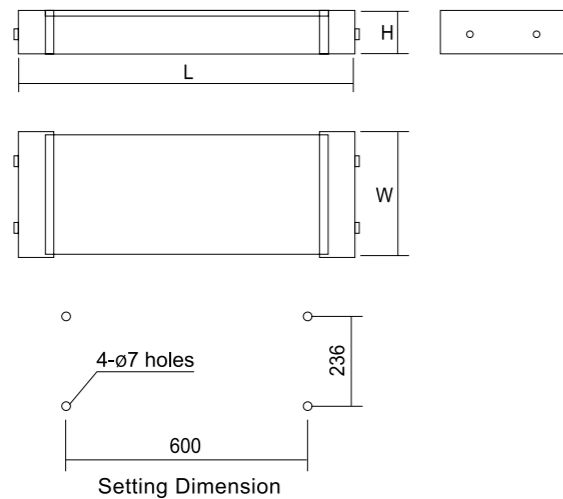

■ Light Distribution Curve [Cd / 1000lm]

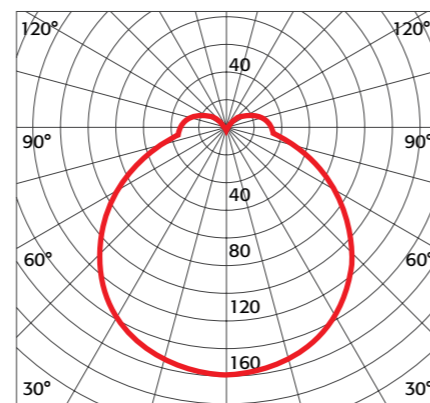

Specification

Model No.	Capacity	L(mm)	W(mm)	H(mm)	Weight(Kg)	Remarks
FL320NS-GJS	20W X 3	750	282	65	3.54	
FL320NS-GJS	20W X 3	750	282	65	3.56	5W
FL320NS-GJS	20W X 3	750	282	65	3.56	10W

Option - Emergency DC Lamp - Dimming - Battery back-up

FL-NF Recessed Ceiling Light

IP20



Application
Accommodation area, saloon, dining hall

Protection degree IP20


Materials
Body : Electro zinc coated steel sheet
Diffuser : Opal acryl / Red acryl

Finish
Body : White epoxy powder coat and stove enamelled(Munsell No. N-9.3)


Equipment
Fluorescent lamp : 18/36W
Light sources : T26
Lamp base : G13
Six cable inlet holes (diameter : Max.16mm)

Electrical
AC 100~240V, 50/60Hz are available on request
Ballast : Glow, Electronic

■ Technical Drawing

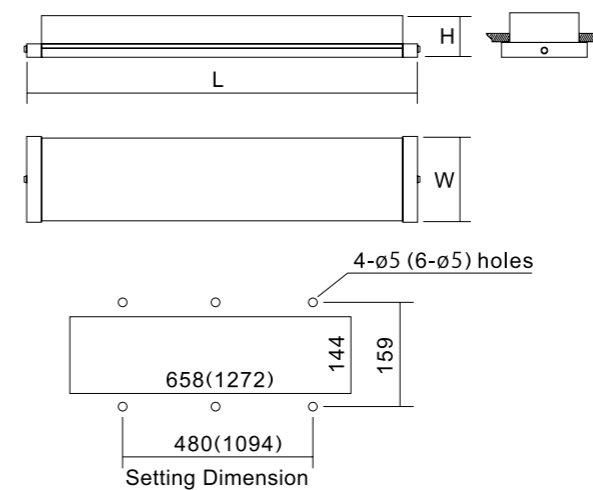

■ Light Distribution Curve [Cd / 1000lm]

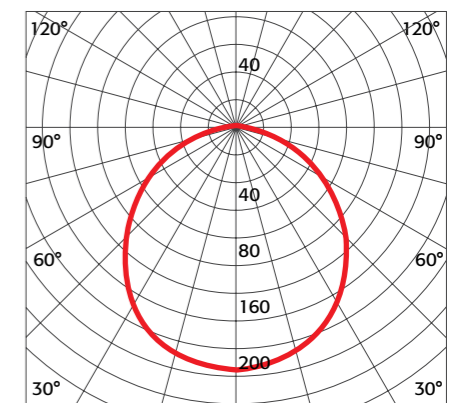

Specification

Model No.	Capacity	L(mm)	W(mm)	H(mm)	Weight(Kg)	Remarks
FL120NF-GIS	18W X 1	680	184	100	3.80	
FL220NF-GIS	18W X 2	680	184	100	4.21	
FL140NF-GIS	18W X 1	1295	184	100	5.79	
FL240NF-GIS	18W X 2	1295	184	100	7.48	

Option - Emergency DC Lamp - Dimming - Battery back-up