


Point level | Vibration | Powders

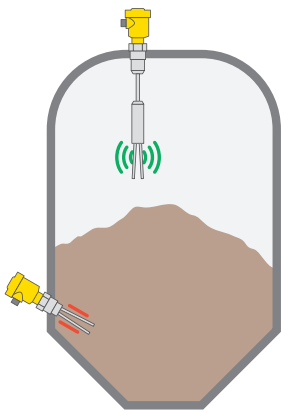

Vibrating level switch for powders

VEGAWAVE reliably detects both minimum and maximum levels of powdery and fine-grained bulk solids with a grain size of up to 10 mm. The tuning fork is suitable for adhesive and abrasive products as well as bulk solids with very low density. Its design means it is unaffected by buildup.

The vibration of VEGAWAVE is damped when covered by any bulk solids. Its electronics converts this signal into a switching command which can be used, for example, to protect against overfilling or empty level.

The advantages

- ✓ Simple setup without adjustment
- ✓ Reliable point level detection unaffected by pressure, temperature or dust generation
- ✓ Maintenance-free operation

BASIC

VEGAWAVE S61



PRO

VEGAWAVE 61/63



PRO

VEGAWAVE 62



| | | | |
|---------------------|---------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Application | Powders and fine-grained bulk solids | Powders and fine-grained bulk solids | Powders and fine-grained bulk solids |
| Version | Compact version or with tube extension up to 1.5 m | VEGAWAVE 61: Compact version VEGAWAVE 63: Tube extension up to 6 m | Suspension cable up to 80 m |
| Measuring range | Bulk solids from 100 g/l | Bulk solids from 8 g/l | Bulk solids from 8 g/l |
| Material | 316L | 316L, CarboCer coating | 316L and PUR or FEP, CarboCer coating |
| Process fitting | Thread G1½ | Thread G1½, 1½ NPT, flanges from DN 50, 2", hygienic fittings | Thread G1½, 1½ NPT, flanges from DN 50, 2", hygienic fittings |
| Process temperature | -50 ... +150 °C | -50 ... +250 °C | -40 ... +150 °C |
| Process pressure | -1 ... +25 bar (-100 ... +2500 kPa) | -1 ... +25 bar (-100 ... +2500 kPa) | -1 ... +6 bar (-100 ... +600 kPa) |
| Signal output | Relay, transistor output | Relay, transistor, two-wire, NAMUR output, contactless electronic switch | Relay, transistor, two-wire, NAMUR output, contactless electronic switch |
| Display | Control lamp (LED) | Control lamp (LED) or pluggable display module PLICSLED | Control lamp (LED) or pluggable display module PLICSLED |
| Approvals | ATEX, UKEX | ATEX, UKEX, IECEx, FM, CSA, EAC (GOST), UKR Sepro, SIL2, NEPSI, KOSHA/KTL, CCOE | ATEX, UKEX, IECEx, FM, CSA, EAC (GOST), UKR Sepro, SIL2, NEPSI, KOSHA/KTL, CCOE |
| Benefit | ✓ Minimal time and cost expenditure thanks to simple setup without medium | | |

Controllers see page 64–69