



# 1020600943

VSP-223-L

Main Station - Batteryless Telephone System - 12-Way

- 12 extensions selector switch
- ⊘ Built-in relay latch timer for activation of external visible or audible 24V DC signal units
- Alarm stop button
- Noise compensated microphone
- Optical LED call indication at front (in addition to audible call signal)
- Flush mounted
- ✓ Wall mounting with corresponding metal cabinet type MBOKS-G
- ⊘ Desk mounting with corresponding wooden cabinet type VSPC-OAK
- Suitable for installation in control rooms and noisy areas like steering gear, engine- and thrusterrooms, etc

## Description VSP-223-L Main Station: Noice Cancelling Batteryless Telephone

The VSP-223-L Main Station enhances our 12-Way Batteryless Telephone System with features tailored for noisy areas.

Features includes:

- ✓ Versatile Installation Options: Flush-mount, wall, or desk for optimal placement.
- External Signal Activation: Built-in relay latch timer for activating external alarms, improving safety alerts.
- Noise-Compensated Microphone: Ensures clarity in communication in areas like engine rooms.


The VSP-223-L is suitable for installation in control rooms and noisy areas like the steering gear, engine- and thruster rooms, etc, ensuring clear uninterrupted communication even in critical situations such as full blackout of the vessels power.

### **Technical Dimensions**

#### www.zenitel.com

#### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

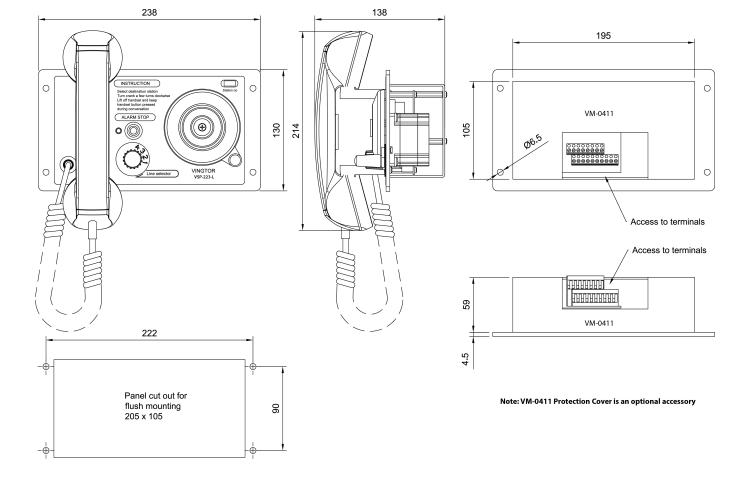

#### www.zenitel.com

#### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

## Specifications

#### GENERAL

Connections	Screw terminals
Color	Black
IP rating	IP-44
Dimensions (WxHxD)	238 x 130 x 77 mm
Panel cut-out	205 x 105 mm
Weight	1.30 kg
Operating temperature range	-25°C to 55°C
Swiching Current (max)	4 A
Compass Safe Distance	> 155cm

### Accessories



Ritor.

VM-0411 Protection cover for VSP-stations

MBOKS-G VSP Batteryless Telephone System



VSPC-OAK Wooden OAK Cabinet



VSP-36-PEL-A

Headset with boom mic, headband, and 10m cable



VSP-36-PEL-A/20

Headset with boom mic, headband, and 20m cable



CD-4

Plugbox Waterproof



VSP-36-PELP-A

Headset with boom mic, headband, and 10m cable



VSP-36-PELP-A/20

Headset with boom mic, headband, and 20m cable

#### page 3/4

#### www.zenitel.com

#### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.



VSP-36-PELP-A/25

Headset with boom mic, headband, and 25m cable





IRR-24

Relay Box

IRR-VSP-220 Relay box 220V AC for VSP-12 way

#### www.zenitel.com

#### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.